


4G burglar alarm system

Newly upgraded intelligent anti-theft

4G communication

No WiFi required

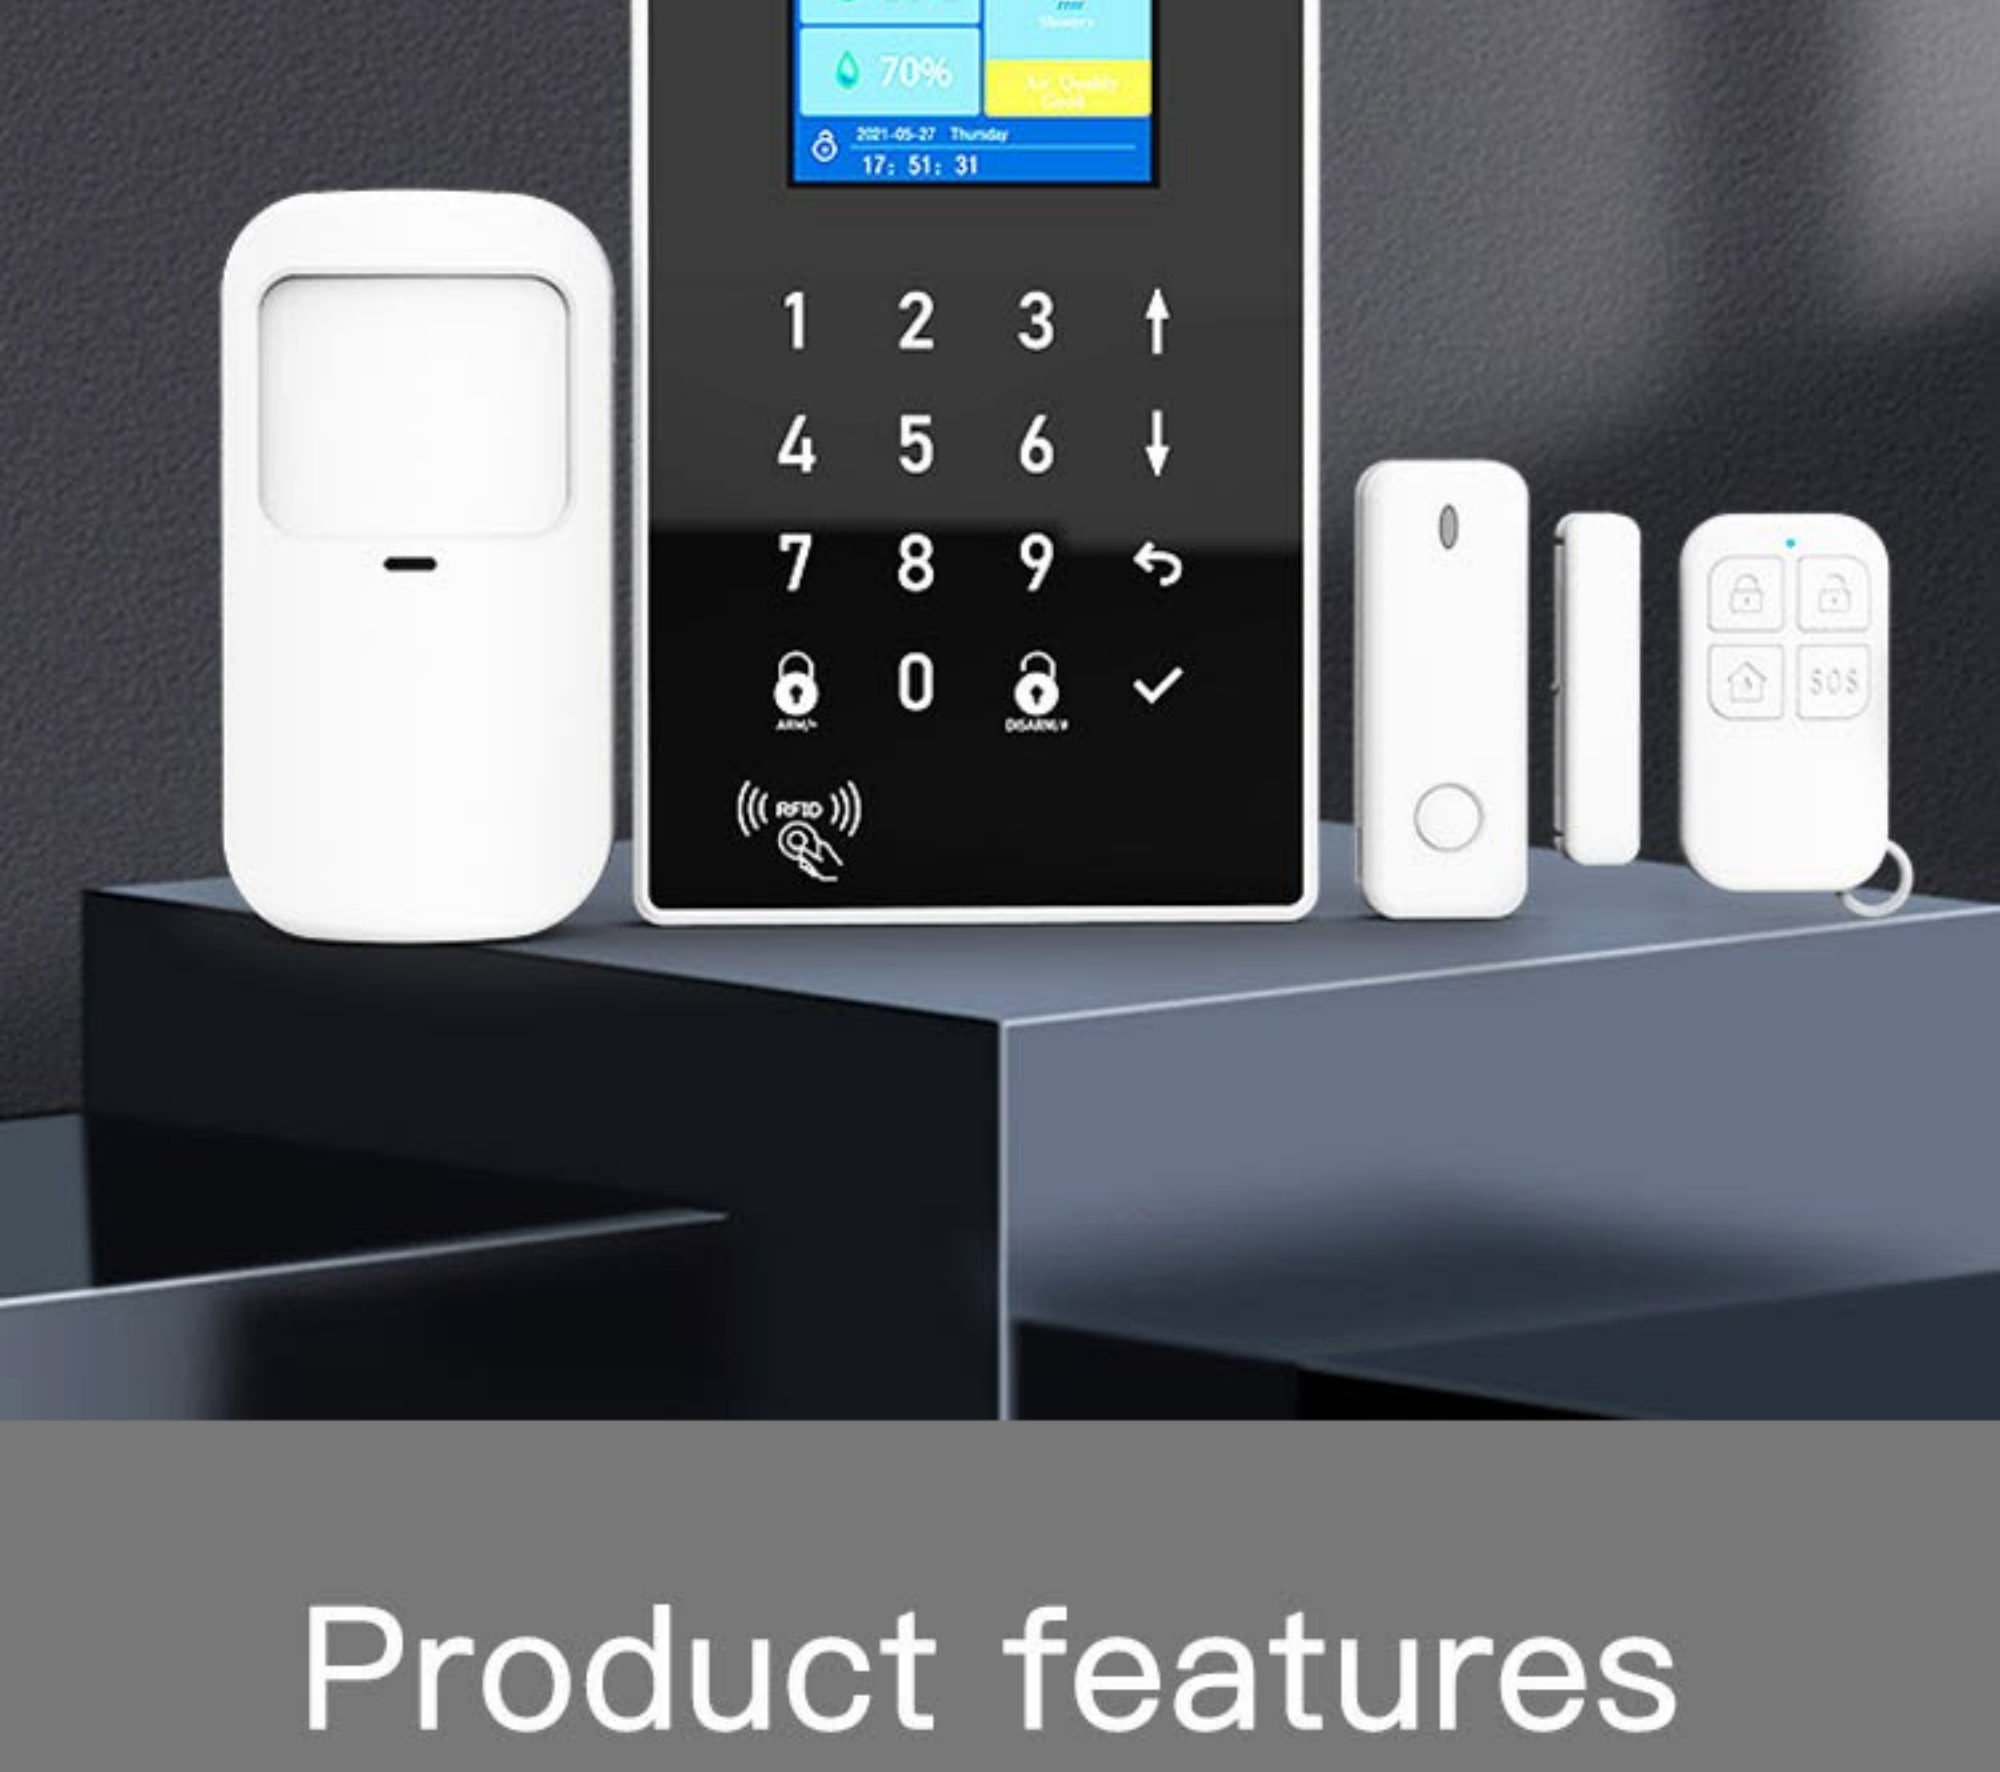

Product features



Capacitive touch screen



4G traffic



TFT color screen



3 sets of wired defense zones



100 groups of wireless defense zones



Voice prompts



Tips in 11 languages




5 groups of alarm numbers




APP control

How it works

The host inserts a mobile phone card, and when the detector is triggered, the host will sound a horn to deter thieves. At the same time, call or send a text message to notify the owner, and the owner takes timely measures.

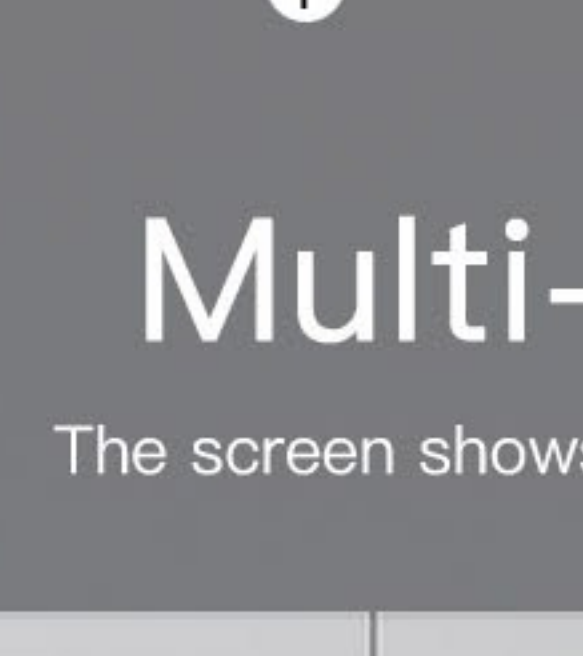

①

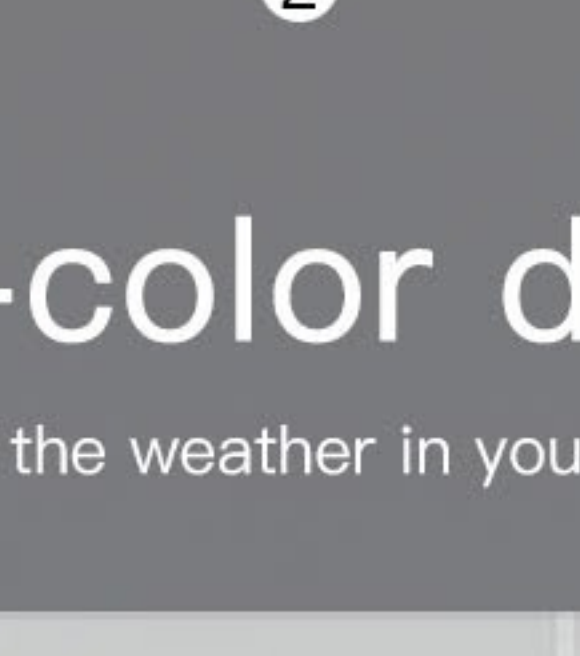


②



③

Multi-color display

The screen shows the weather in your area via the web.

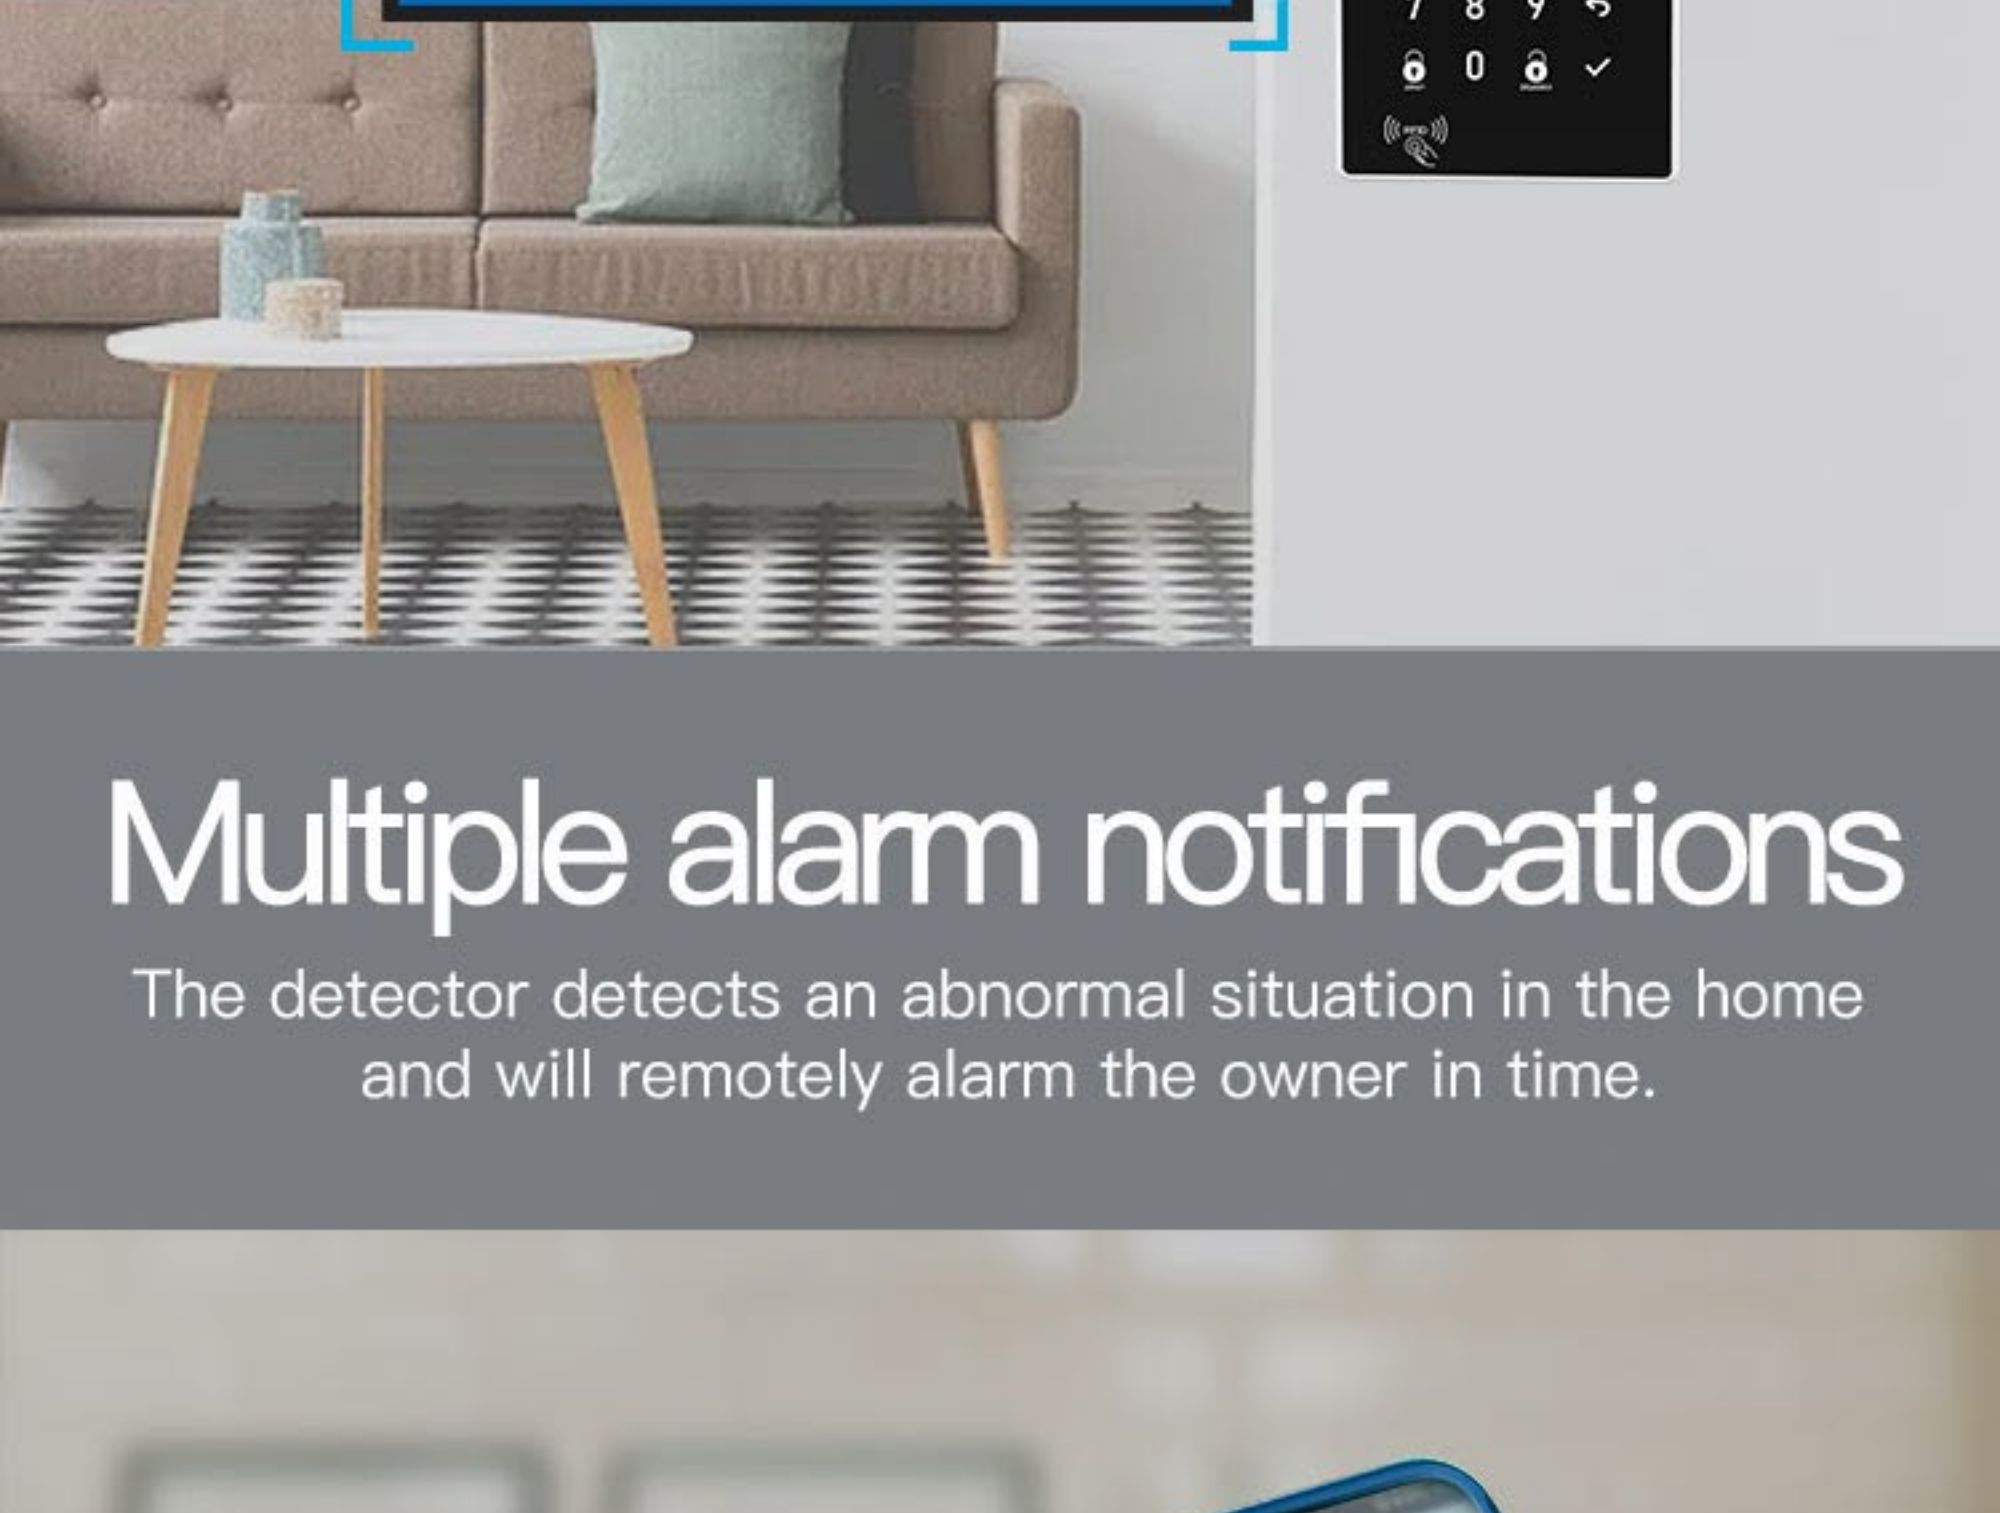


The remote alarm notifies the owner, and the host will Send a text message or make a call as well APP push notifications

Doodle APP control

Voice Control via Google Assistant and Amazon Alexa



Hello Google, disarm the alarm system!

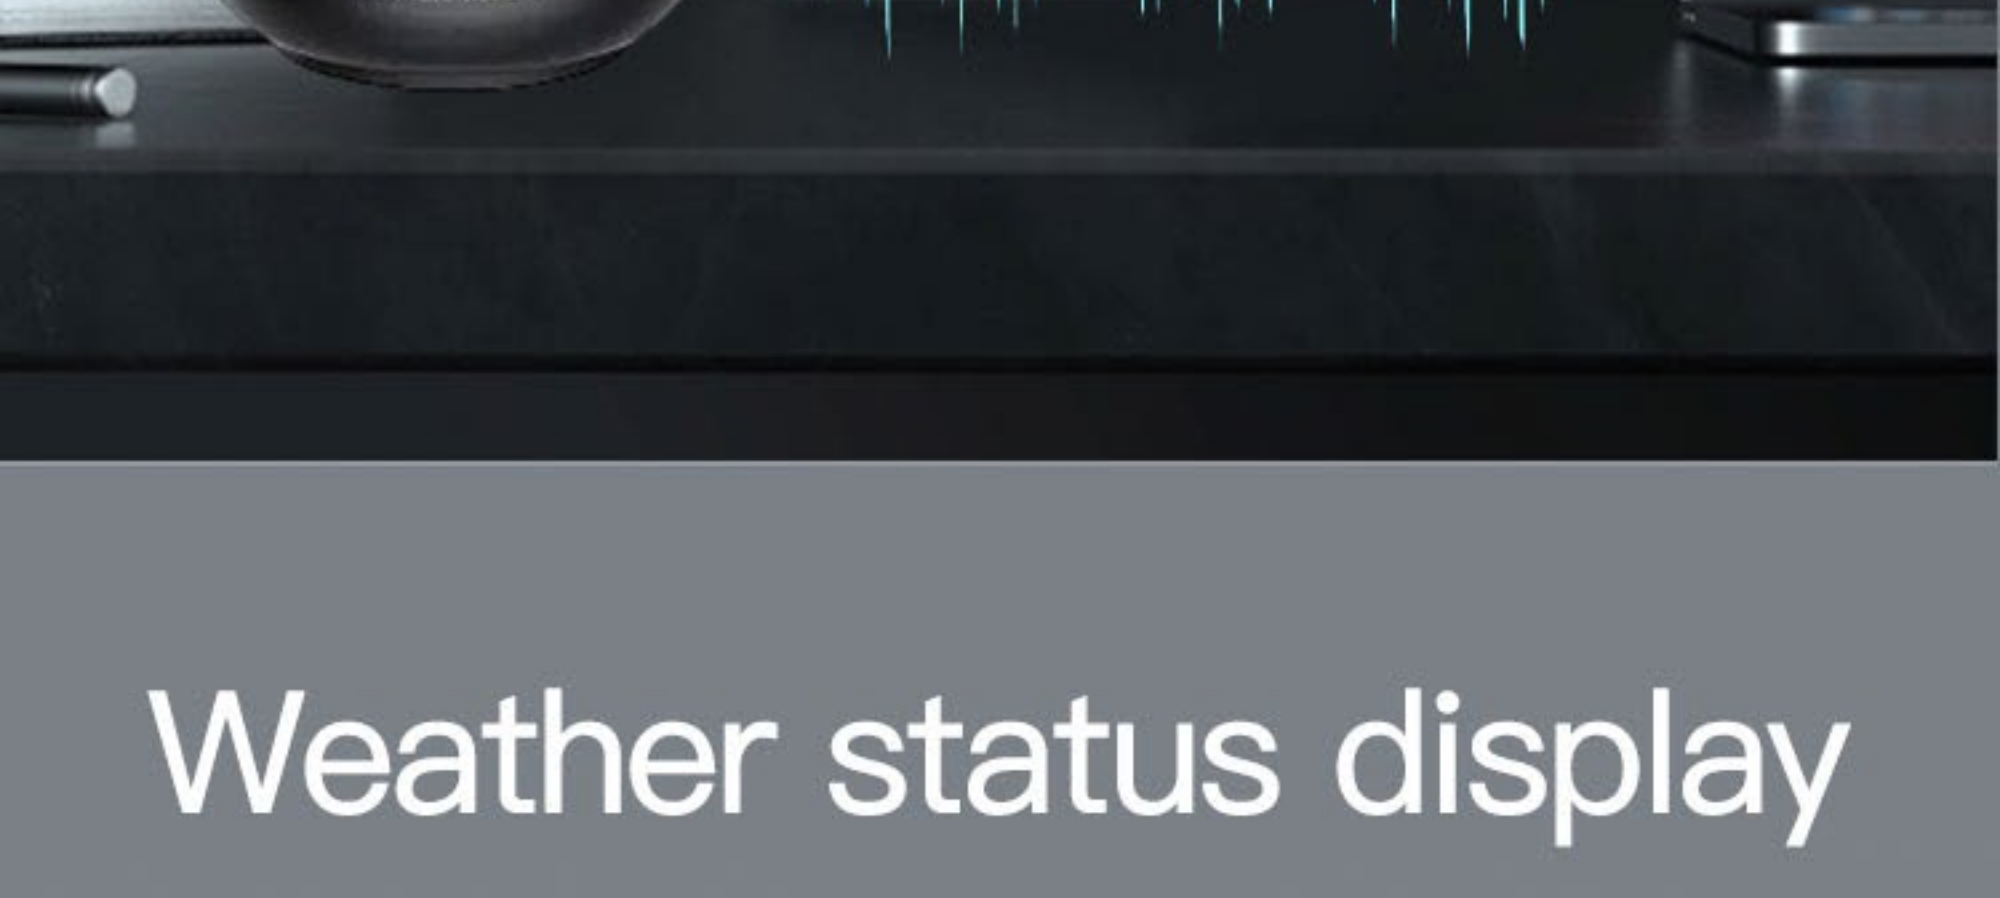

Weather status display



Product parameters

Input voltage: Type-C standard interface power supply, 5VDC/2A
Operating current: <150mA
Alarm current: <500mA
Backup battery: 3.7V, 500mAh rechargeable polymer lithium battery
Display: 2.8 inch color TFT display, resolution: 320x240
Alarm output: 3.5mm stereo socket, output current: <500mA
Input: 4x4 keyboard, capacitive touch
Wireless frequency: 433Mhz
Wireless code: eV1527
Wireless debugging mode: OOK
Wireless reception sensitivity: -113dBm
Wireless transmission power: 10dBm
RFID card standard: EM4100/125KHz Working temperature: -10~55°C
RFID card sensing distance: <2cm

Product structure

