

Wireless carbon monoxide alarm

Strong sensitive detection 3M adhesive
Safeguard your home, take precautions



Sensitive



Alarm quickly



LCD display



Flame retardant material




Sound and light alarm



Fault self-check

PLACES THAT EASILY PRODUCE CARBON MONOXIDE IN LIFE




Charcoal heating




Gas pipe rupture




Hot pot box



Bathroom poisoning



Forget to turn off gas




Sleeping in the car

85 decibel alarm


High volume alarm

85 decibel volume alarm, loud enough to remind you,
but will not feel noisy

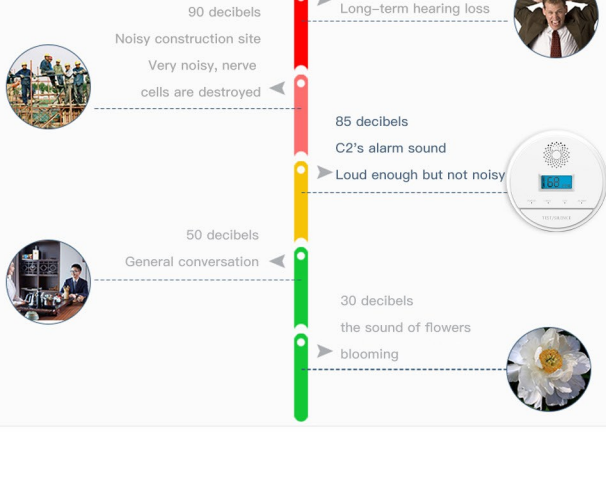

Safety tentacles visible

Fault self-check LCD screen display

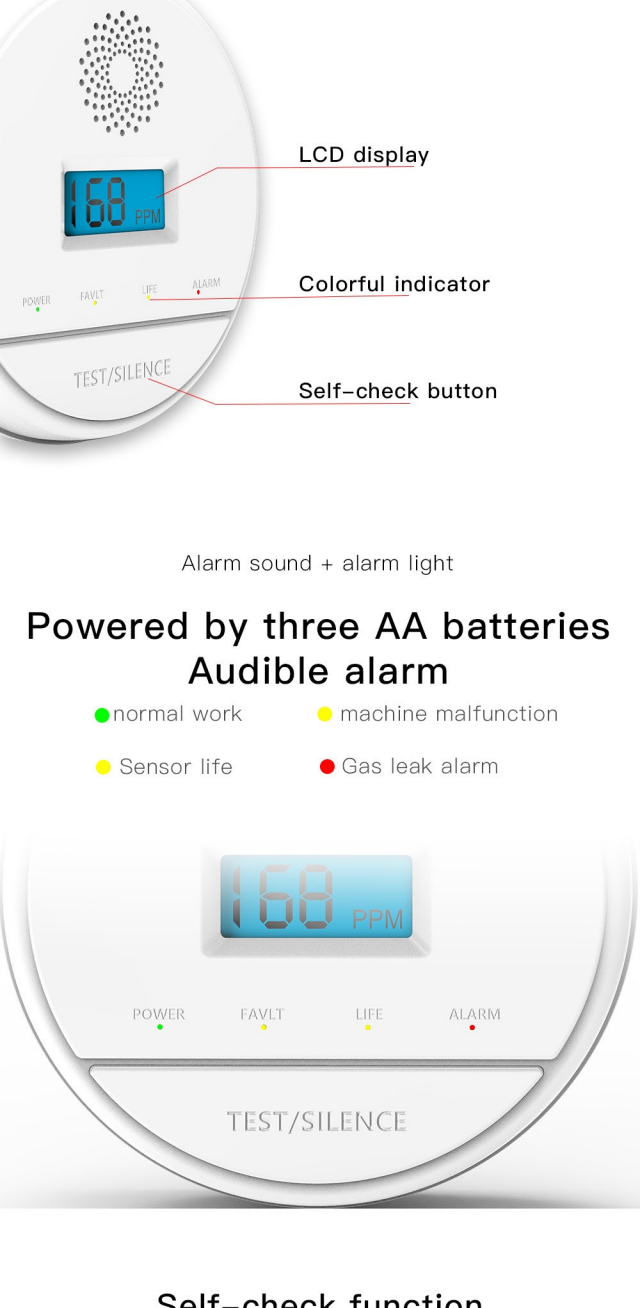

Powered by three AA batteries

Audible alarm

- normal work
- machine malfunction
- Sensor life
- Gas leak alarm

Self-check function


The green light flashes once every 60 seconds,
which proves that the device is operating normally



Installation method



Fire alarm system

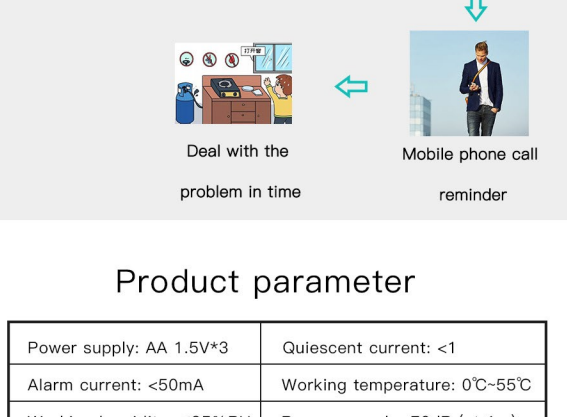

Product parameter

Power supply: AA 1.5V*3	Quiescent current: <1
Alarm current: <50mA	Working temperature: 0°C~55°C
Working humidity: ≤95%RH	Buzzer sound: >70dB (at 1m)
Battery life: at least 1 year	
Green light: normal monitoring (interval 60s)	
Sensor life: 5 years	Life yellow light: sensor life
Red light: alarm	Fault yellow light: fault
Low voltage alarm: ≤3.6V (green light flashes, buzzer and LO are displayed instantly at the same time)	
100PPM	Alarm within 30 seconds
Wireless frequency	433MHz
Launch distance 100 meters (open area)	